


Technical data

Micro Inverter Series WiFi 1.6 & 2.0



MICROINVERTER FOR UP TO 4 PV MODULES

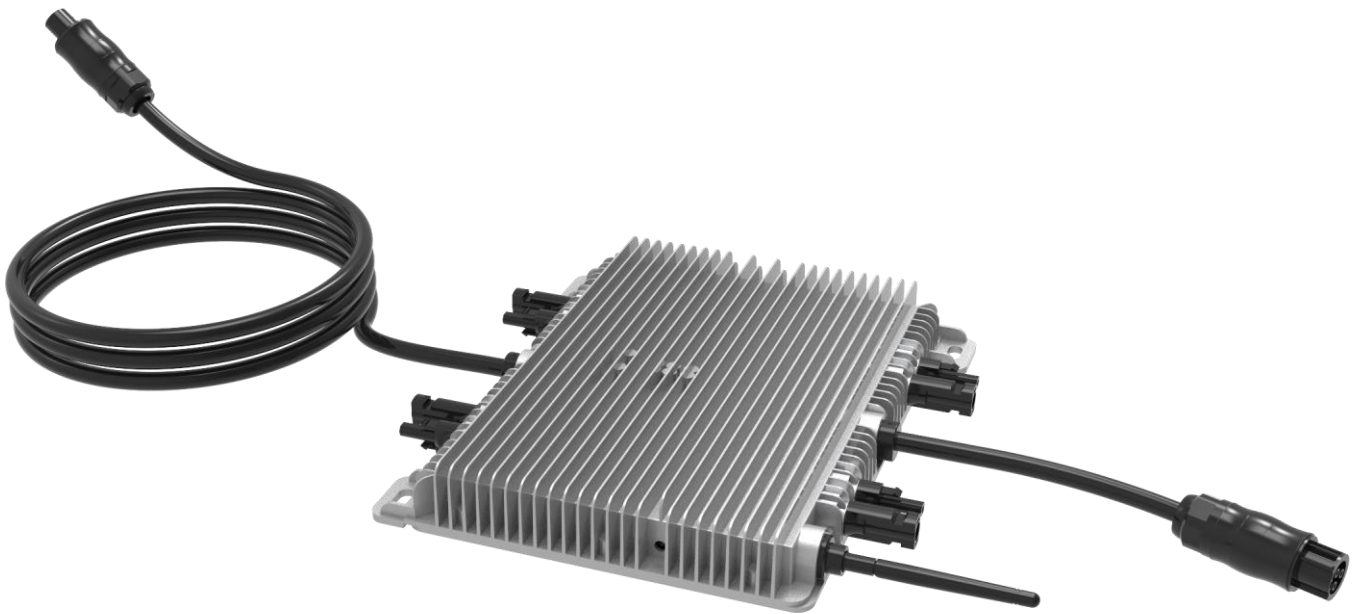

MAXIMUM CUSTOMER SATISFACTION



PLUG & PLAY



Micro Inverter Series WiFi 1.6 and 2.0

Technical Data

	MISW 1.6	MISW 2.0
Input data (DC)		
Recommended Input Power (STC)	210 – 500 W	210 – 600 W
MPPT Voltage Range	25V – 55V	
Operation Voltage Range	20V – 60V	
Maximum Input Voltage	60V	
Maximum Input Current	12.5A x 4	
Maximum DC Short Circuit Current	19.5 A x 4	
Output Data (AC)		
Peak Output Power	1600 W	2000 W
Maximum Output Current	7 A	8.7 A
Nominal Voltage / Range	220V/ 230V (0.85 Un - 1.1 Un)	
Nominal Frequency / Range	50/60 Hz	
Extended Frequency / Range	45-55 Hz/55-65 Hz	
Power Factor	>0.99	
Maximum units per branch	4	3
Max. Allowed Altitude Operation	< 4000 m	
Max. Inverter Backfeed Current to Array	0 A	
Maximum Output Fault Current	10 A	
Max. Output Overcurrent Protection	7.7 A	9.6 A
Efficiency		
Maximum Inverter Efficiency	96.5%	
Weighted CEC Efficiency	95%	
Static MPPT Efficiency	99%	
Night Power Consumption	50 mW	
Mechanical Data		
Operating Ambient Temperature Range	-40°C .. +65°C	
Dimensions (W x H x D)	267mm X 300mm X 42.5mm	
Weight	5.2 kg	
Protection Class	Class I	
Enclosure Rating	IP67	
Cooling	Natural Convection – No fans	
Features		
Compatibility	Compatible with 60, 72 cell PV modules	
Communication	Wi-Fi	
Certificates	EN50549, VDE0126, VDE4105, IEC62109, CE, INMETRO	
Warranty	10 years	

CAUTION: READ THE INSTRUCTION AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.

© Copyright 2020. All rights reserved. The specifications of the data sheet can be changed without prior notice.

